







**Notes:**

58 x 58 mm fullrange speaker,  
treated paper cone,  
mylar dustcap,  
rubber edge,  
rubber gasket,  
terminals:

„+“ 2.8 x 0.5 mm  
„-“ 2.8 x 0.5 mm

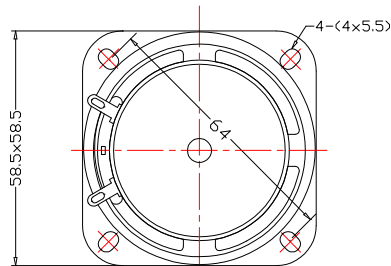

impedance:	4/8 $\Omega$
nom. power:	5 watts
SPL 1W/1m	82 dB
fs:	203 Hz
Re:	3.77.5 $\Omega$
Le:	0.1 mH
Qms:	3.07
Qes:	1.51
Qts:	1.01
VAS :	0.18 l
Mms :	0.82 g
Rms :	0.37 kg/s
Cms:	0.74 mm/N
B*I:	2.19 Tm
Sd:	13.2 cm <sup>2</sup>
Xmax:	1 mm
weight:	0.124 kg
magnet:	2 oz
voice coil $\varnothing$ :	14 mm

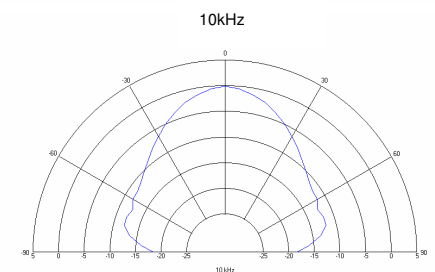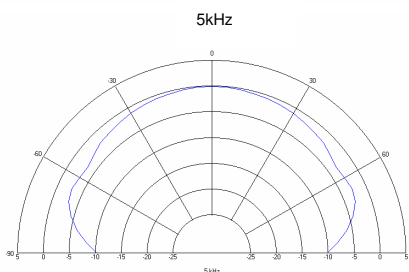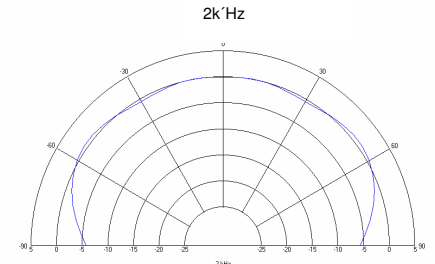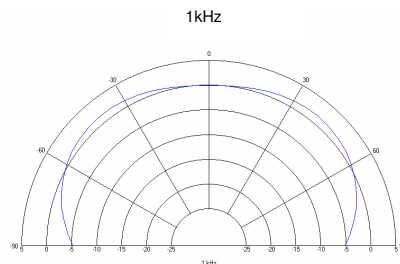

TECHNICAL DATA ARE MEASURED WITH ATB – EQUIPMENT ACCORDING EN – 60268 –5.

FOR PRODUCT IMPROVEMENT HKM RESERVES ALTERATIONS IN SPECIFICATIONS AND DESIGN WITHOUT FURTHER ANNOUNCEMENT

FOR TOLERANCES OF TECHNICAL DATA REFER TO HKM 'S MANUAL OF TECHNICAL DATA

FOR INFORMATION CONTACT: TEL.: +49 9073 / 9585 0, FAX.: +49 9073 / 9585 55, E-MAIL:INFO@HKM-GROUP.DE